

# COLORADO™ 1



## CONTROL FEATURES

- 3 or 9-channel DMX-512 LED wash light (with ID addressing)
- Operating modes
  - 3-channel: RGB control
  - 9-channel: RGB, RGB, ID, dim, macro, strobe, automatic, custom, snap/fade
- Blackout/static/dimmer/strobe/pulse
- RGB color mixing with or without DMX control
- Built-in automated programs via master/slave, DMX or COLORado™ Controller
- Recall custom programs via master/slave or DMX
- RGB fade delay channel for snapping or fading

## ADDITIONAL FEATURES

- Available in black or silver
- Ingress Protection: IP66
- Additional power output: max. 30 units @ 120V (see manual for details)
- LED display with password protection
- Gel frame holder (4mm max. thickness)
- Transfer custom programs among fixtures
- Power and signal linkable with COLORado™ 6, COLORado™ 3 & COLORado™ 1
- Double-bracket yoke works as floor stand

## SPECIFICATIONS




- Installed optics: 15°
- Beam angle: 12°
- Field angle: 24°
- Lux: 14,741 @ 1m, 510 @ 5m, 145 @ 10m
- Light source: 36 (12 red, 12 green, 12 blue) high power 1W (350mA) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 51W, 0.5A operating, 0.4A inrush, PF 0.72
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 9.5lbs (4.3kg)
- Size: 15.7in x 13.4in x 11.4in  
399mm x 340mm x 289mm

## OPTIONS

- COLORado™ Controller (COLOR-CON)
- Additional optical systems available: 10°, 30°
- 16.4ft (5m) power extension cable (IP5POWER)
- 16.4ft (5m) signal extension cable (IP5SIG)



• Gel frame holder (4mm max. thickness)

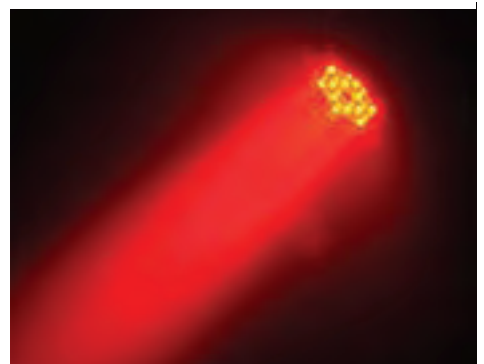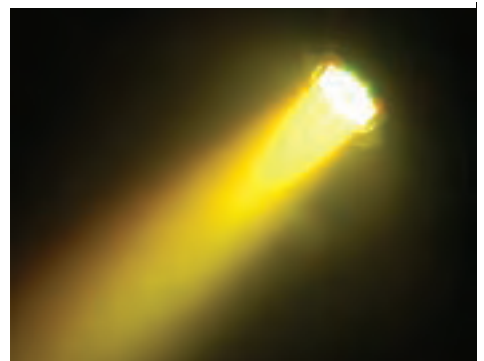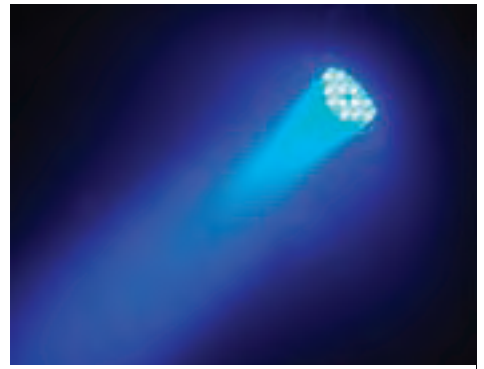

3952 South Illinois Avenue  
Carbondale, Illinois 62903  
800.697.4670 • 618.529.7031 fax  
[info@beautifuldisplays.com](mailto:info@beautifuldisplays.com)