
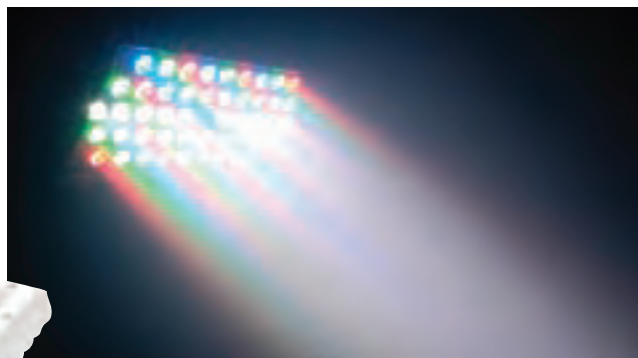
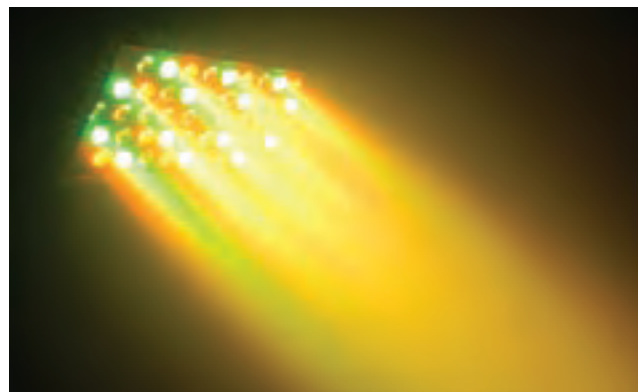


COLORADO™ PANEL

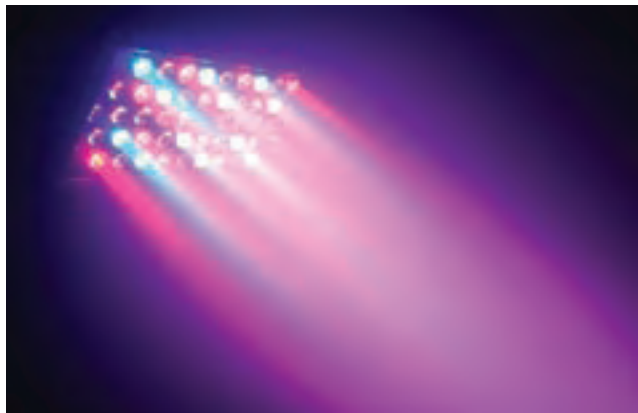

CONTROL FEATURES

- 3, 4, 5 or 9-channel DMX-512 LED bank system (with ID addressing)
- Operating modes
 - 3-channel: RGB control
 - 3-channel: HSV control (hue, saturation and value)
 - 4-channel: RGBW control
 - 4-channel: RGB, dim
 - 5-channel: RGBW, dim
 - 9-channel: RGBW, ID, dim, strobe, macro, auto, custom, balance, Hyper Color™
- RGBW color mixing with or without DMX control
- Color temperature presets (3,200°K - 10,000°K) or create your own
- Built-in automated programs via DMX
- Recall custom programs via DMX

ADDITIONAL FEATURES

- Available in white or black
- Hyper Color™ allows the LEDs to be driven at higher current for increased output
- Ingress Protection: IP66
- Additional power output: max. 12 units @ 120V (see manual for details)
- LCD display with lock-out feature

SPECIFICATIONS

- Installed optics: 15°
- Beam angle: 13° x 9°
- Field angle: 25° x 22°
- Lux (normal): 23,026 @ 1m
- Light source: 48 (12 red, 14 green, 12 blue, 10 white) high power 2W (600mA) LEDs 50,000hrs
- Power and current (normal): 120V, 60Hz: 145W, 1.2A operating, 0.6A inrush, PF 1.00
- Power and current (high power): 120V, 60Hz: TBA
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 18lbs (8.2kg)
- Size: 15in x 7.5in x 7.5in
381mm x 191mm x 191mm

OPTIONS

- COLORado™ Controller (COLOR-CON)
- Additional optical systems available: 10°, 30°



beautiful
DISPLAYS
.com

3952 South Illinois Avenue
Carbondale, Illinois 62903
800.697.4670 • 618.529.7031 fax
info@beautifuldisplays.com

CHAUVET
Value · Innovation · Performance

Specifications subject to change without notice • All products meet CSA and CE standards