


Tubular 10' Dome Tent

The Tubular Dome Tent is a branding opportunity and attention getter at any outdoor festival, exhibition or event. The Tubular Dome Tent is constructed with 30mm silver anodized tubes and quickly assembles with snap button connectors. The canopy is custom printed, water and UV-resistant. The Tubular Dome Tent is made in the USA.

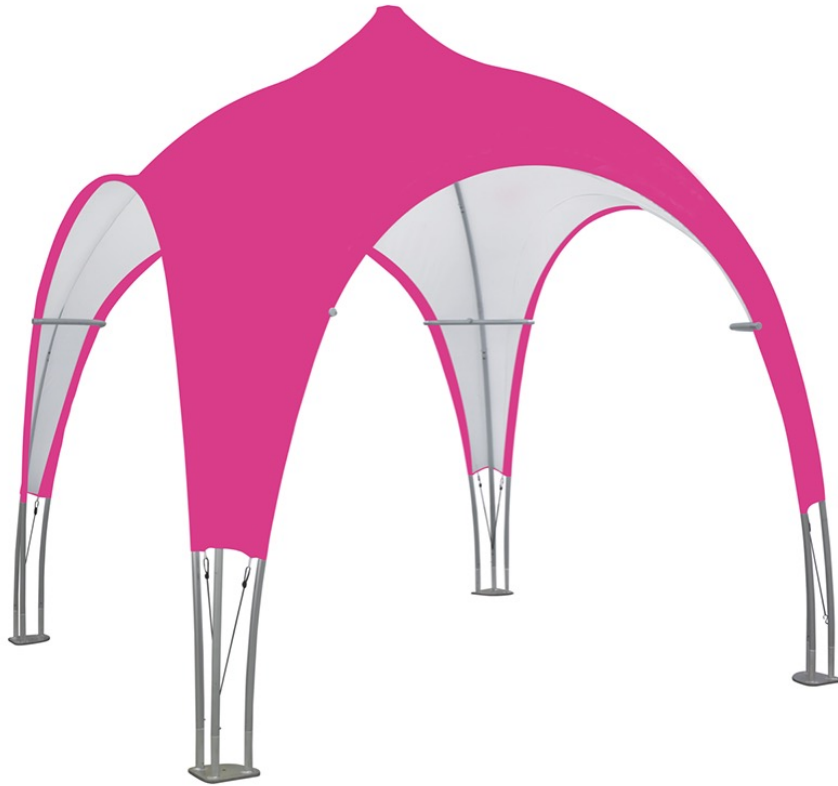

features and benefits:

- **NEW**
- Base size of 9.6' x 9.6'
- Aluminum tubular frame assembles quickly and easily with snap button connectors
- Custom printed canopy is water and UV-resistant
- Made in the USA
- Hardware kit includes frame
- Canopy kit includes canopy, frame and cases
- Easily disassembles and stores compactly in two hard shell expandable cases
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit:
116" w x 122.37" h x 116" d
2946mm x 3108mm x 2946mm

Approximate weight (includes graphic):
53.06 lbs / 24.07 kgs

Shipping

Shipping dimensions - ships in 2 cases:
66" l x 18" h x 18" h
1676mm(l) x 457mm(h) x 457mm(h)

Approximate shipping weight (with cases):
96 lbs / 43.54 kgs

Graphic

Total visual area:
Overall graphic size (qty 4): 137" w x 108.5" h

Top Triangle: 12.5" w x 9.5" h

Top Trapezoid: 32.5" h x 16" h

Dome: 137" w x 88.5" h

Pole Pocket (must be solid color):
131.75" w x 45.5" h

Please be sure to include a 2" bleed around the perimeter.

Refer to related graphic template for more information.

additional information:


Graphic material:
Outdoor canvas

Lifetime hardware warranty voided if damaged due to adverse weather conditions




We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

Parts Included		
Part Label	Qty	Part Code
30MM TUBE SECTION	x4	PART 2
30MM TUBE SECTION	x4	PART 3
9MM TUBE SPREADER SECTION	x4	PART 4
30MM TUBE SECTION WITH BASE PLATE	x4	PART 5
4-WAY SWAGED	x1	PART 1
FABRIC GRAPHIC WITH BUNGEE CORDS	x1	TNT-TDT-10-G




TOP VIEW



FRON VIEW







ISO VIEW

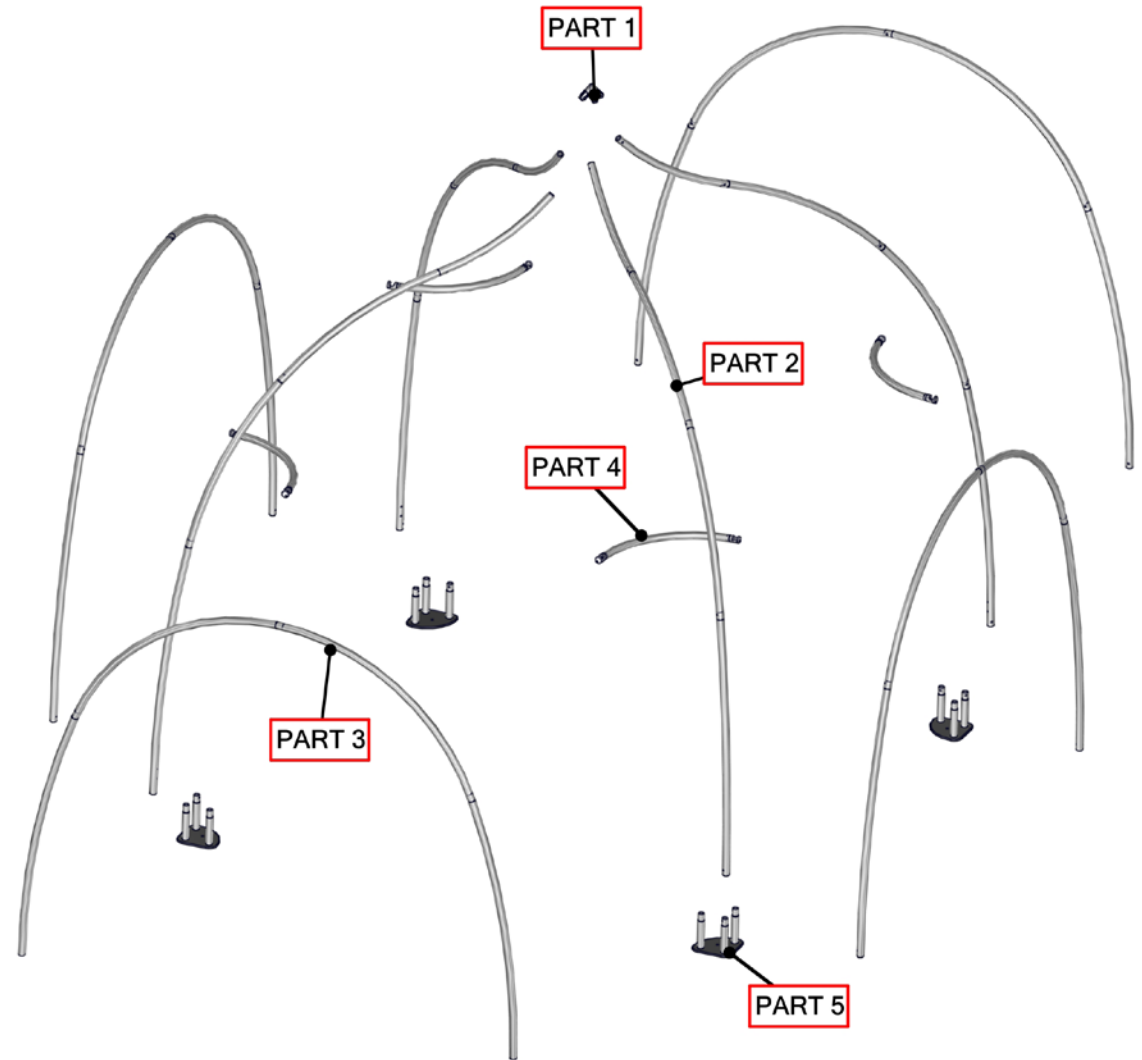


Step 1: Tube Assembly

- Assemble unit by laying tubes flat on the floor.
- Snap PART 1 (corner piece) into PART 2 (tubes with bungee cords).
- Repeat for all four sides.
- Snap on tube rails by pressing the push pin buttons in and sliding over.

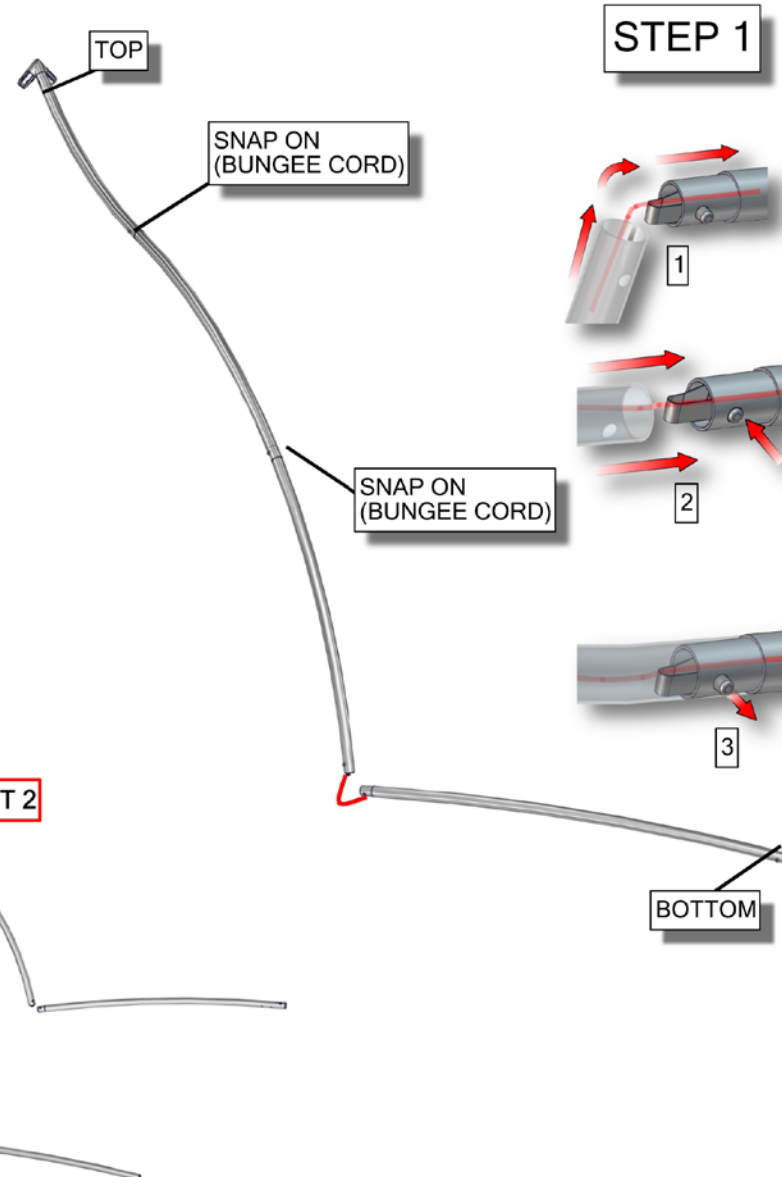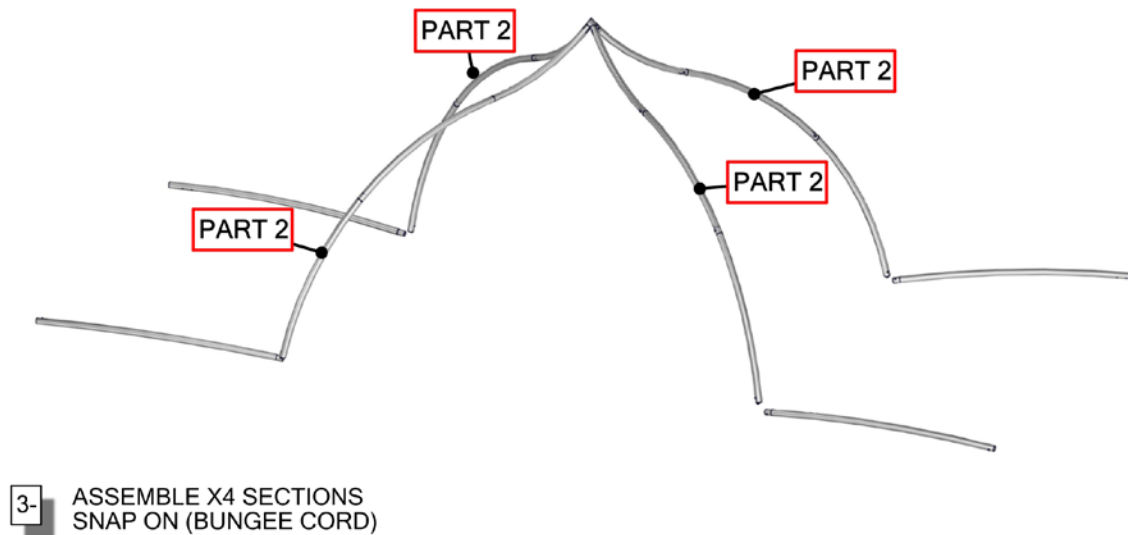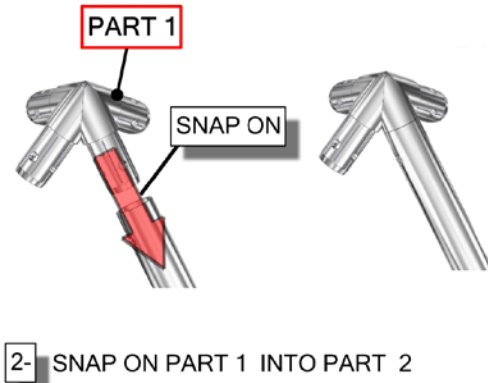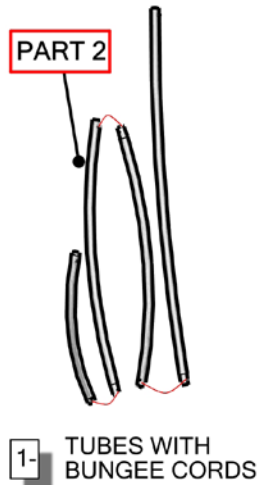


Step 2: Graphic & Tube Assembly



- Carefully remove the graphic from the bag.
- Drape graphic over the frame and align center.
- Assemble 4 bottom sections by pressing snap on button, aligning tube pole and connecting
- Install PART 5 (bases) by lifting up on one side of the tent at a time and lining up the base. Connect the tube rails to each base by pressing the snap on buttons and sliding over.

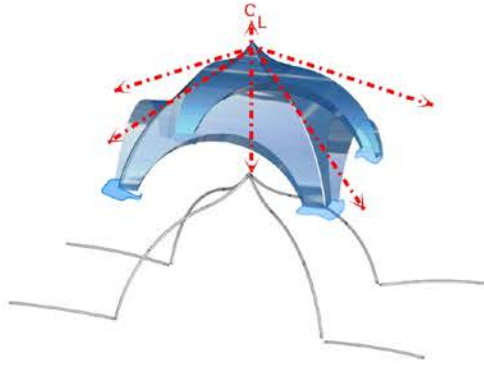

1- ALIGN AND CENTER FABRIC GRAPHIC WITH THE FRAME.

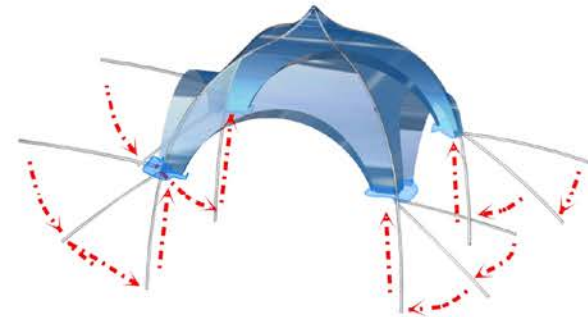

2- ASSEMBLE X4 BOTTOM SECTIONS SNAP ON (BUNGEE CORD)

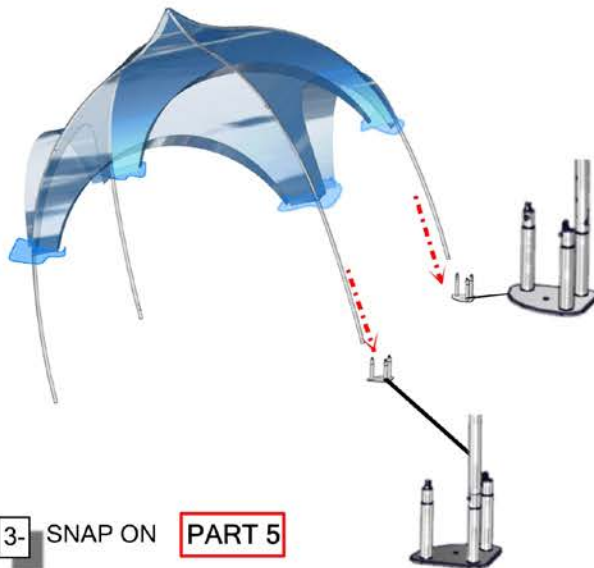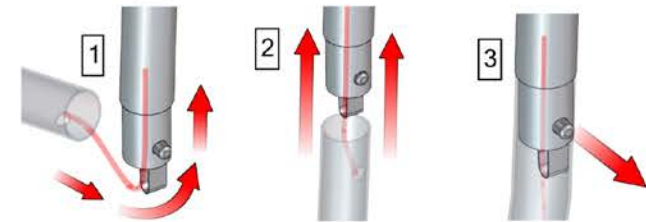


3- SNAP ON PART 5




Step 3: Tube Assembly


- Carefully insert PART 3 bungee-cord tube to fabric pocket, then snap on. See diagram.
- Snap on PART 3 (bungee-cord tube) to PART 5 (base) on both ends
- Repeat for all four sides

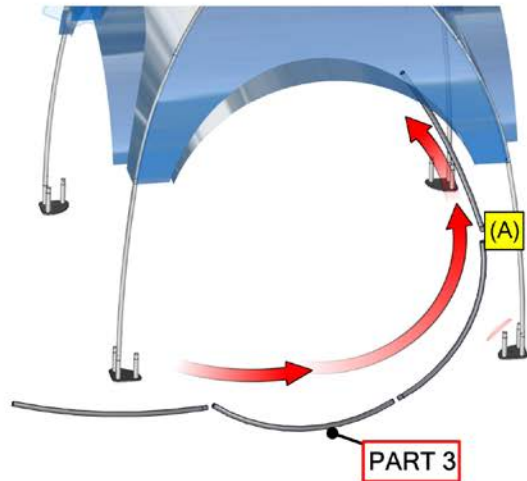


1- INSERT PART 3 TO FABRIC POCKET, THEN SNAP ON (BUNGEE CORD) SEE (A)

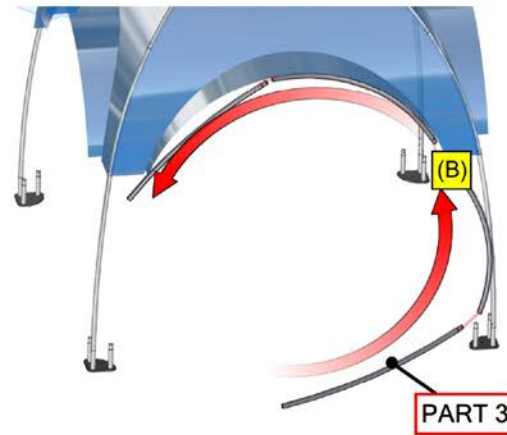

2- INSERT PART 3 TO FABRIC POCKET, THEN SNAP ON (BUNGEE CORD) SEE (B)



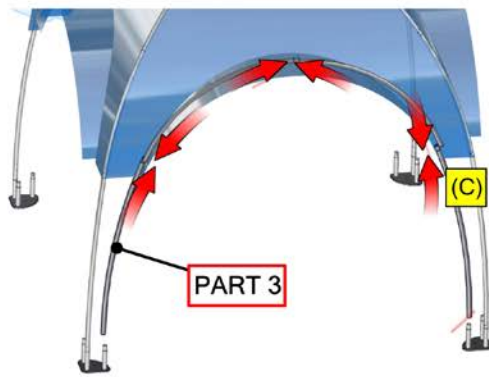


3- INSERT PART 3 TO FABRIC POCKET, THEN SNAP ON (BUNGEE CORD) SEE (C)

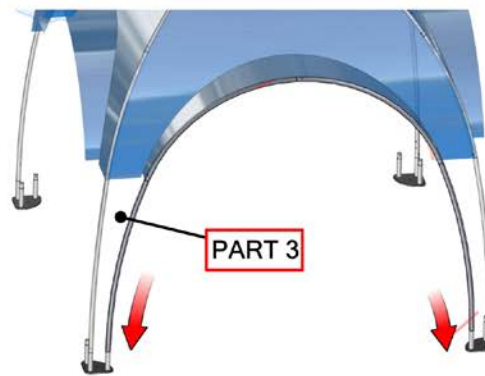

3- SNAP ON PART 3 TO PART 5 ON BOTH ENDS

SNAP ON (BUNGEE CORD)



FOLLOW 1,2,3,4 FOR ALL SIDES

Step 4: Secure Graphic & Tension Frame

- Secure graphic to Tubular Tent using supplied clips and bungee cords.
- Gently pull fabric into place.
- Loop around clip and hook bungee cord to fabric tabs forming a V-shape.
- Repeat for all four corners.
- To achieve proper tension, pull the tubes to the side to tension.
- Install PART 4, curved spreader on all four corners of frame. Higher for less tension, lower for more tension.

